

# Manufacturer source pages

Original product brochure excerpt | Published with context October 14, 2026

## What this document contains

Six original pages from the manufacturer brochure supplied to SlopeMotive: original PDF pages 4-9 (printed pages 03-14). Original page content is preserved. This selection excludes the company introduction, promotional certification page and contact pages.

## How to use the source

Compare the named model and specification row with the website or specification summary. Multiple models appear on each original page. A model appearing in this excerpt does not automatically mean it is offered in the current website catalog.

## Claims and limitations

This is source evidence of what the brochure states. It is not independent testing, certification or a final contractual datasheet. Brochure slope, productivity, fuel-consumption and application claims are not verified operating limits. Follow the current model-specific manual and documented site conditions.

## Known differences

For 452-80L, earlier parameter material and the brochure differ on travel speed. The public summary follows the brochure and requests configuration confirmation. For 195-80YC, the 372 kg weight is not identified as bare-machine or packed weight. The 608-80L fuel-consumption row reads "four-stroke"; it is not a fuel-consumption value.

## Provenance and corrections

Supplied manufacturer product brochure; original publishing date and revision not provided. SlopeMotive added this explanatory cover on October 14, 2026. Request a current revision or report a discrepancy at [dizhengshuo@gmail.com](mailto:dizhengshuo@gmail.com). Product documentation: <https://slopemotive.com/machines#catalog-sources>.

# Product Parameters

## OFF-ROAD TANK 810-130A

|                          |                                       |
|--------------------------|---------------------------------------|
| Packing specification    | 1510*1810*800mm                       |
| Overall dimensions       | 1430*1710*680mm                       |
| Mowing width             | 1300mm                                |
| Knife disk lifting       | 10-200mm                              |
| Walking speed            | 0-6km/h                               |
| Walking style            | Electric tracked walking              |
| Maximum climbing angle   | 60°                                   |
| Number of blades         | 4 pieces                              |
| Operation method         | Remote control operation              |
| Total weight             | 470KG (bare machine)/540KG (packaged) |
| Power                    | 27HP                                  |
| Startup method           | Remote control start stop             |
| Maximum fuel consumption | 2L/H                                  |
| Fuel                     | 92 octane and above gasoline          |
| Engine                   | Briggs&Stratton                       |
| Maximum efficiency       | 4000m²-5500m²/h                       |

# Product Parameters

## OFF-ROAD TANK 764-90A

|                        |                                                                                                     |
|------------------------|-----------------------------------------------------------------------------------------------------|
| Packing specification  | 1510*1370*800mm                                                                                     |
| Overall dimensions     | 1400*1300*630mm                                                                                     |
| Mowing width           | 900mm                                                                                               |
| Knife disk lifting     | 10-200mm                                                                                            |
| Walking speed          | 0-6km/h                                                                                             |
| Walking style          | Electric tracked walking                                                                            |
| Maximum climbing angle | 60°                                                                                                 |
| Scope of application   | Embankment, highway slope protection, orchard,Under lawn photovoltaic panels, land reclamation, etc |
| Operation method       | Remote control operation                                                                            |
| Total weight           | 308KG (bare machine)/380KG (packaged)                                                               |
| Power                  | 27HP                                                                                                |
| Startup method         | Remote control start stop                                                                           |
| Stroke                 | four-stroke                                                                                         |
| Fuel                   | 92 octane and above gasoline                                                                        |
| Engine                 | LONCIN                                                                                              |
| Maximum efficiency     | 3000m²-4000m²/h                                                                                     |

# Product Parameters


## OFF-ROAD TANK 608-90A



|                        |                                                                                                     |
|------------------------|-----------------------------------------------------------------------------------------------------|
| Packing specification  | 1510*1370*800mm                                                                                     |
| Overall dimensions     | 1400*1300*630mm                                                                                     |
| Mowing width           | 900mm                                                                                               |
| Knife disk lifting     | 10-200mm                                                                                            |
| Walking speed          | 0-6km/h                                                                                             |
| Walking style          | Electric tracked walking                                                                            |
| Maximum climbing angle | 70°                                                                                                 |
| Scope of application   | Embankment, highway slope protection, orchard,Under lawn photovoltaic panels, land reclamation, etc |
| Operation method       | Remote control operation                                                                            |
| Total weight           | 330KG (bare machine)/390KG (packaged)                                                               |
| Power                  | 22HP                                                                                                |
| Startup method         | Remote control start stop                                                                           |
| Stroke                 | four-stroke                                                                                         |
| Fuel                   | 92 octane and above gasoline                                                                        |
| Engine                 | LONCIN                                                                                              |
| Maximum efficiency     | 4000m <sup>2</sup> /h                                                                               |

# Product Parameters


## OFF-ROAD TANK 608-80A

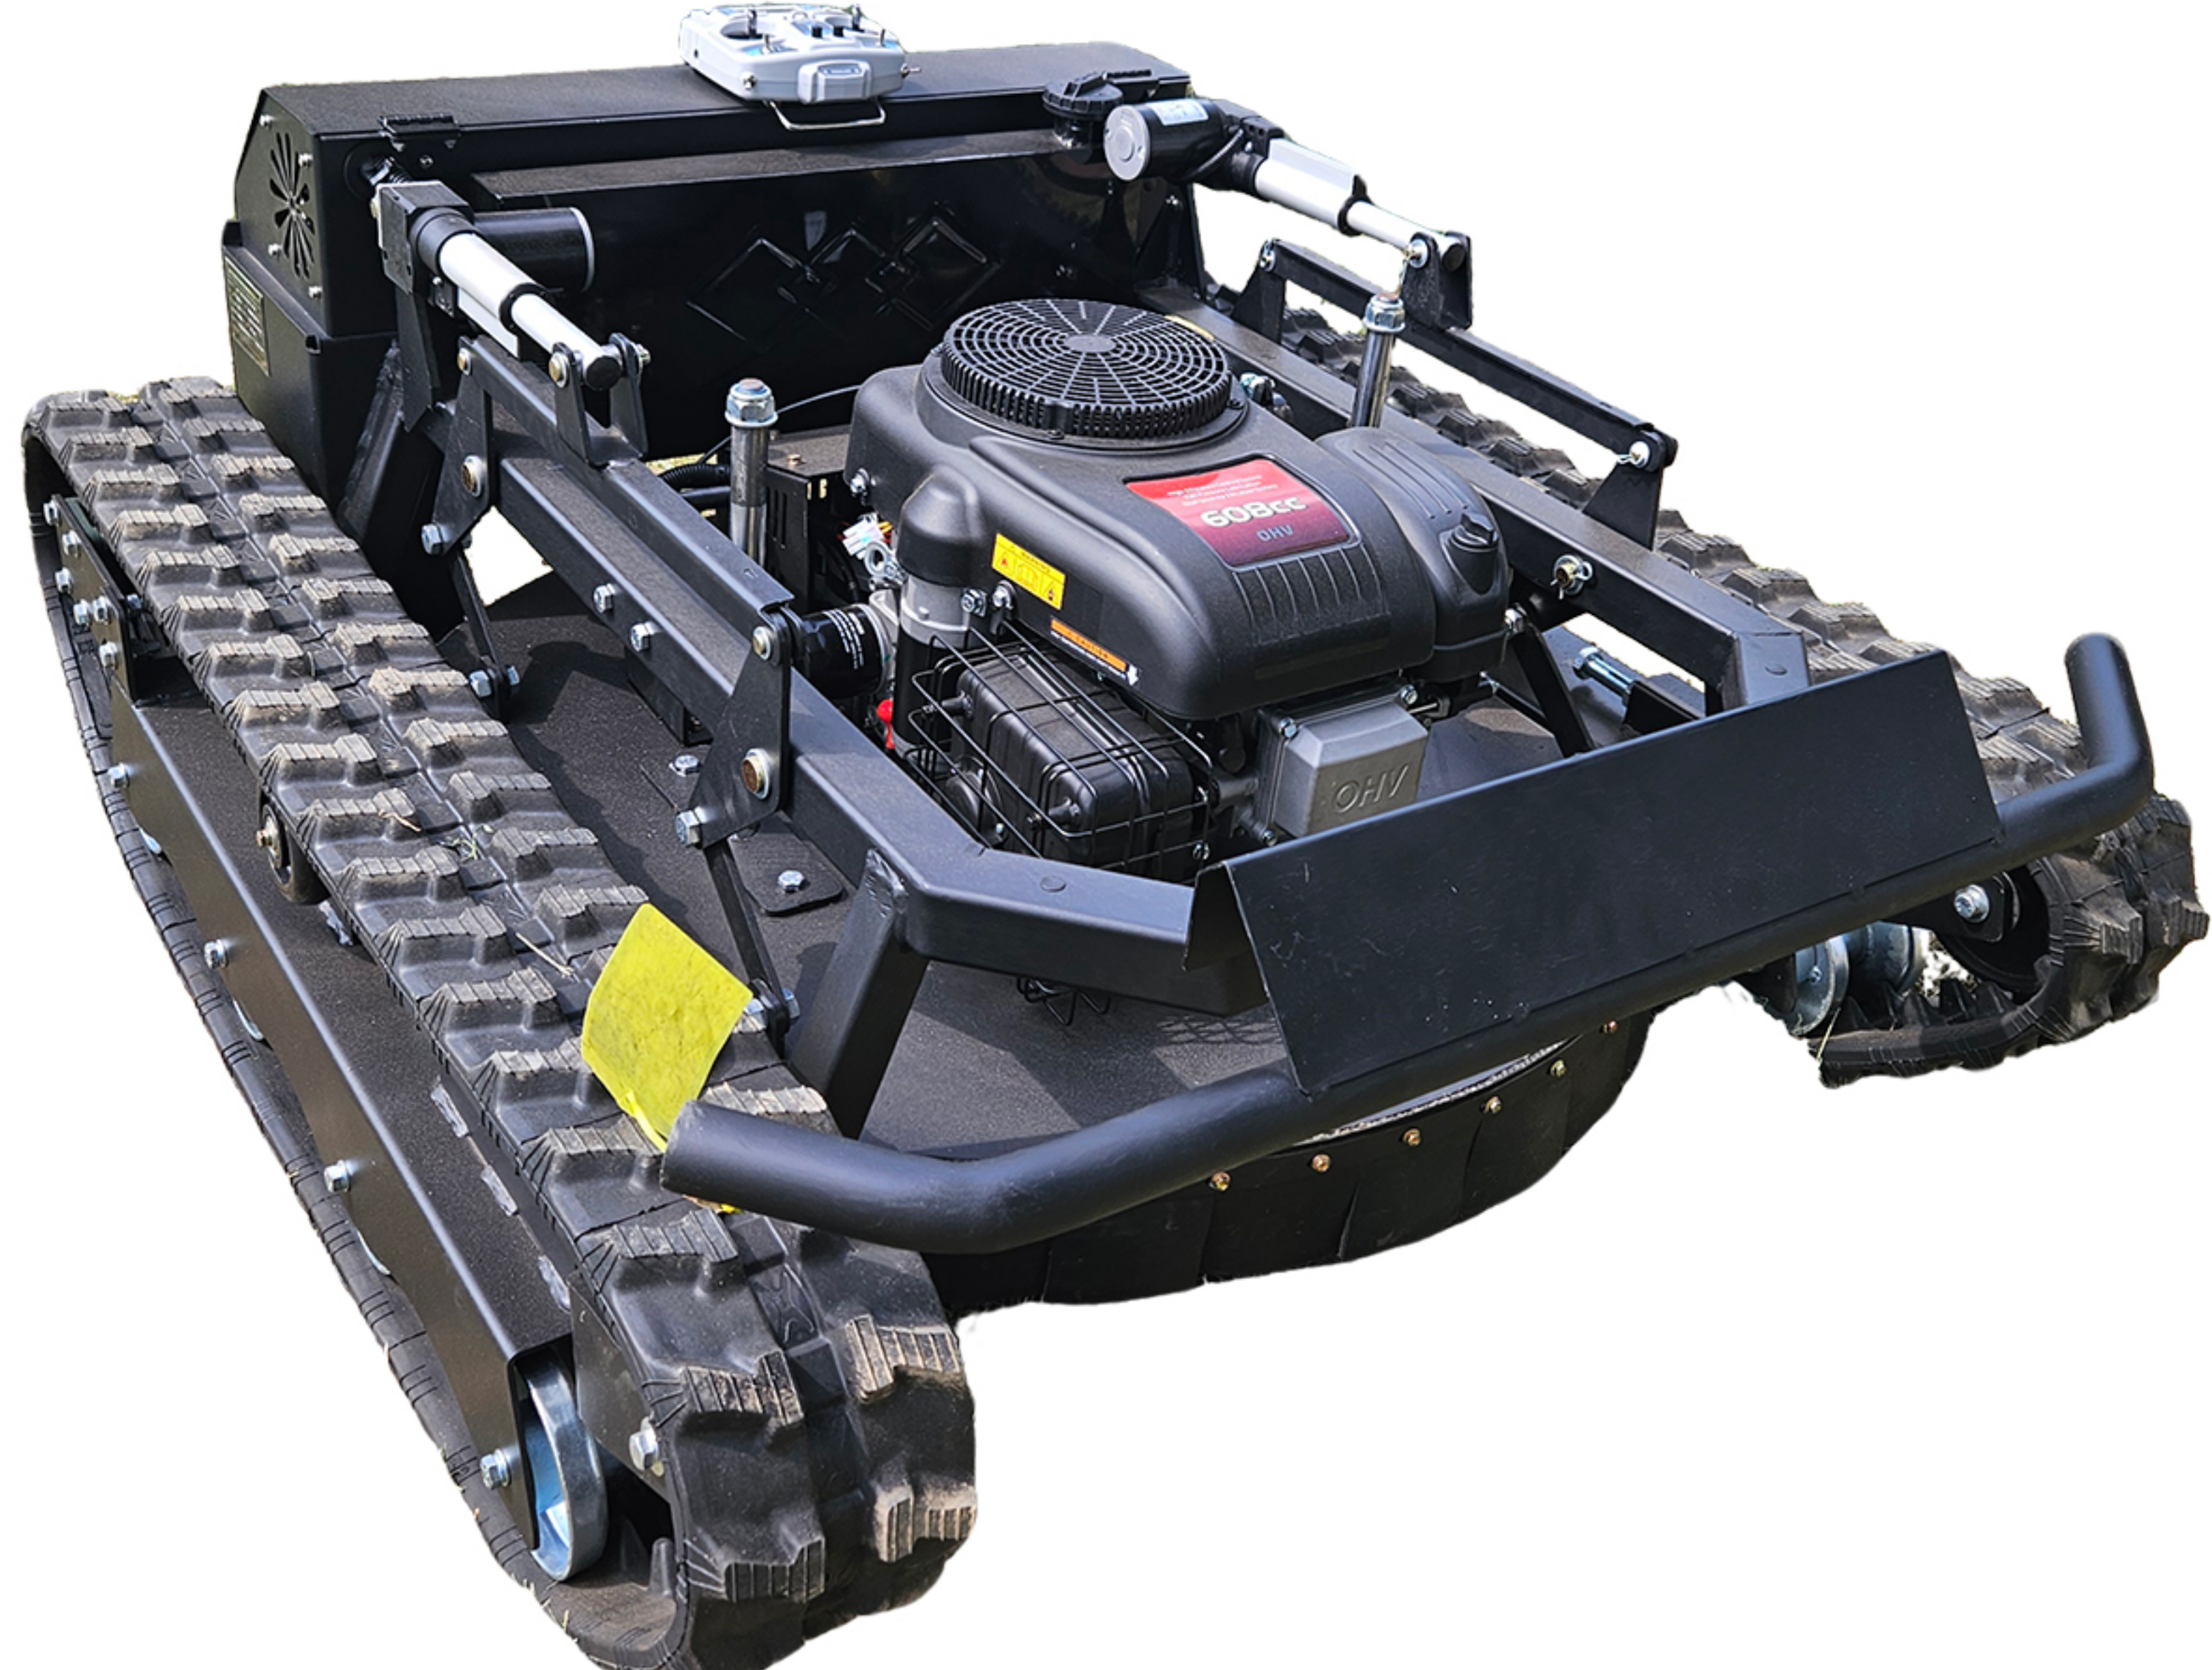

|                        |                                                                                                     |
|------------------------|-----------------------------------------------------------------------------------------------------|
| Packing specification  | 1510*1270*800mm                                                                                     |
| Overall dimensions     | 1380*1200*630mm                                                                                     |
| Mowing width           | 800mm                                                                                               |
| Knife disk lifting     | 10-200mm                                                                                            |
| Walking speed          | 0-6km/h                                                                                             |
| Walking style          | Electric tracked walking                                                                            |
| Maximum climbing angle | 60°                                                                                                 |
| Scope of application   | Embankment, highway slope protection, orchard,Under lawn photovoltaic panels, land reclamation, etc |
| Operation method       | Remote control operation                                                                            |
| Total weight           | 328KG (bare machine)/380KG (packaged)                                                               |
| Power                  | 22HP                                                                                                |
| Startup method         | Remote control start stop                                                                           |
| Stroke                 | four-stroke                                                                                         |
| Fuel                   | 92 octane and above gasoline                                                                        |
| Engine                 | LONCIN                                                                                              |
| Maximum efficiency     | 2500m <sup>2</sup> -3000m <sup>2</sup> /h                                                           |

# Product Parameters

## OFF-ROAD TANK 452-80A

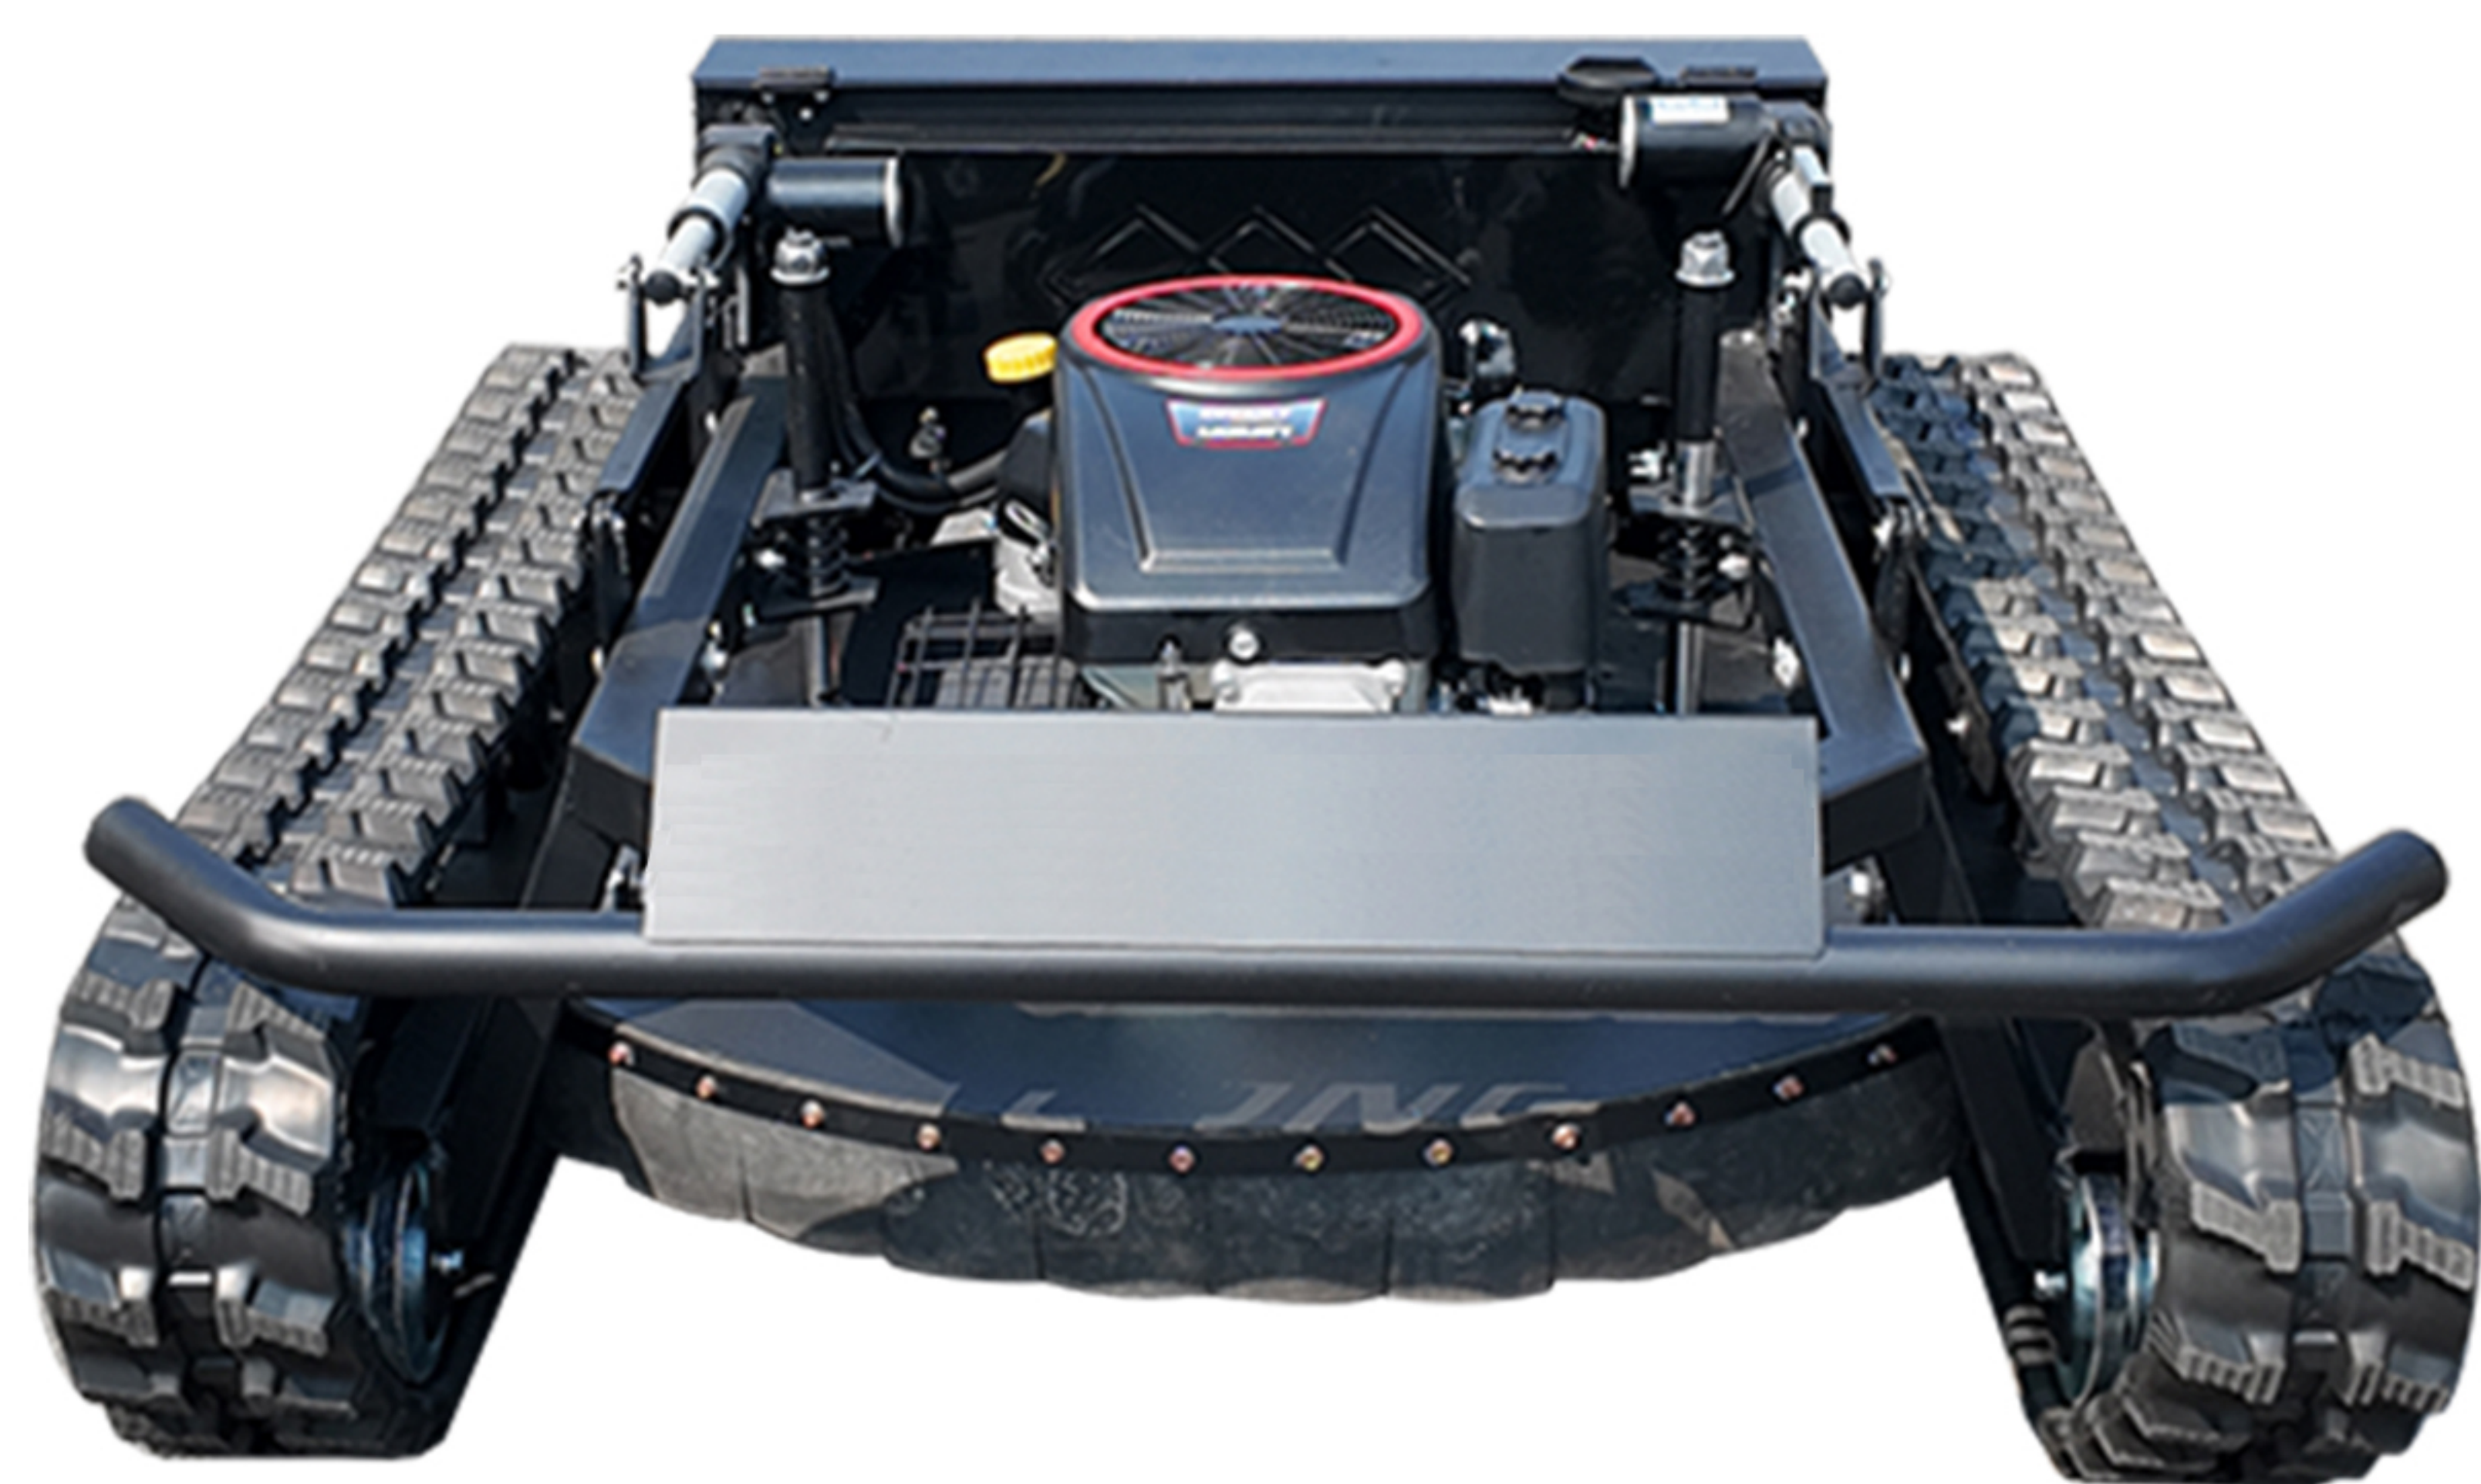

|                        |                                                                                                      |
|------------------------|------------------------------------------------------------------------------------------------------|
| Packing specification  | 1510*1270*800mm                                                                                      |
| Overall dimensions     | 1380*1200*630mm                                                                                      |
| Mowing width           | 800mm                                                                                                |
| Knife disk lifting     | 10-200mm                                                                                             |
| Walking speed          | 0-5km/h                                                                                              |
| Walking style          | Electric tracked walking                                                                             |
| Maximum climbing angle | 60°                                                                                                  |
| Scope of application   | Embankment, highway slope protection, orchard, Under lawn photovoltaic panels, land reclamation, etc |
| Operation method       | Remote control operation                                                                             |
| Total weight           | 323KG (bare machine)/375KG (packaged)                                                                |
| Power                  | 16HP                                                                                                 |
| Startup method         | Remote control start stop                                                                            |
| Stroke                 | four-stroke                                                                                          |
| Fuel                   | 92 octane and above gasoline                                                                         |
| Engine                 | LONCIN                                                                                               |
| Maximum efficiency     | 3000m <sup>2</sup> /h                                                                                |

# Product Parameters

## 195-80YC DIESEL VERSION



|                          |                                    |
|--------------------------|------------------------------------|
| Packing specification    | 1740*920*1070mm                    |
| Overall dimensions       | 1630*950*700mm                     |
| Mowing width             | 800mm                              |
| Knife disk lifting       | 30-200mm                           |
| Walking speed            | 0-5km/h                            |
| Walking style            | Electric tracked walking           |
| Maximum climbing angle   | 45°                                |
| Number of blades         | 48 pieces (2 bends and 1 straight) |
| Operation method         | Remote control operation           |
| Total weight             | 372KG                              |
| Power                    | 18HP                               |
| Startup method           | electric start                     |
| Maximum fuel consumption | 1L/H                               |
| Fuel                     | diesel                             |
| Engine                   | Koop                               |
| Maximum efficiency       | 2000m <sup>2</sup> /h              |

# Product Parameters

## 452-80L LAWN MOWER



|                        |                                                                                                     |
|------------------------|-----------------------------------------------------------------------------------------------------|
| Packing specification  | 1150*1240*750mm                                                                                     |
| Overall dimensions     | 1070*1170*600mm                                                                                     |
| Mowing width           | 800mm                                                                                               |
| Knife disk lifting     | 10-180mm                                                                                            |
| Walking speed          | 0-5km/h                                                                                             |
| Walking style          | Electric tracked walking                                                                            |
| Maximum climbing angle | 60°                                                                                                 |
| Scope of application   | Embankment, highway slope protection, orchard,Under lawn photovoltaic panels, land reclamation, etc |
| Operation method       | Remote control operation                                                                            |
| Total weight           | 240KG (bare machine)/285KG (packaged)                                                               |
| Power                  | 16HP                                                                                                |
| Startup method         | electric start                                                                                      |
| Stroke                 | four-stroke                                                                                         |
| Fuel                   | gasoline                                                                                            |
| Engine                 | LONCIN/Rato                                                                                         |
| Maximum efficiency     | 2500m²/h                                                                                            |

# Product Parameters

## 608-80L LAWN MOWER



|                          |                                                                                                     |
|--------------------------|-----------------------------------------------------------------------------------------------------|
| Packing specification    | 1150*1240*750mm                                                                                     |
| Overall dimensions       | 1070*1170*600mm                                                                                     |
| Mowing width             | 800mm                                                                                               |
| Knife disk lifting       | 10-180mm                                                                                            |
| Walking speed            | 0-4km/h                                                                                             |
| Walking style            | Electric tracked walking                                                                            |
| Maximum climbing angle   | 50°                                                                                                 |
| Scope of application     | Embankment, highway slope protection, orchard,Under lawn photovoltaic panels, land reclamation, etc |
| Operation method         | Remote control operation                                                                            |
| Total weight             | 245KG (bare)/288KG (packaged)                                                                       |
| Power                    | 22HP                                                                                                |
| Startup method           | electric start                                                                                      |
| Maximum fuel consumption | four-stroke                                                                                         |
| Fuel                     | gasoline                                                                                            |
| Engine                   | LONCIN                                                                                              |
| Maximum efficiency       | 3000m²/h                                                                                            |

# Product Parameters

## 224-55L LAWN MOWER



|                        |                                                                                                     |
|------------------------|-----------------------------------------------------------------------------------------------------|
| Packing specification  | 980*980*710mm                                                                                       |
| Overall dimensions     | 900*930*560mm                                                                                       |
| Mowing width           | 550mm                                                                                               |
| Knife disk lifting     | 10-180mm                                                                                            |
| Walking speed          | 0-4km/h                                                                                             |
| Walking style          | Electric tracked walking                                                                            |
| Maximum climbing angle | 50°                                                                                                 |
| Scope of application   | Embankment, highway slope protection, orchard,Under lawn photovoltaic panels, land reclamation, etc |
| Operation method       | Remote control operation                                                                            |
| Total weight           | 140KG (bare)/170KG (packaged)                                                                       |
| Power                  | 9HP                                                                                                 |
| Startup method         | electric start                                                                                      |
| Stroke                 | four-stroke                                                                                         |
| Fuel                   | gasoline                                                                                            |
| Engine                 | LONCIN                                                                                              |
| Maximum efficiency     | 1300m²/h                                                                                            |

# Product Parameters

## 196-55L LAWN MOWER



|                        |                                                                                                     |
|------------------------|-----------------------------------------------------------------------------------------------------|
| Packing specification  | 980*980*710mm                                                                                       |
| Overall dimensions     | 900*930*560mm                                                                                       |
| Mowing width           | 550mm                                                                                               |
| Knife disk lifting     | 10-180mm                                                                                            |
| Walking speed          | 0-4km/h                                                                                             |
| Walking style          | Electric tracked walking                                                                            |
| Maximum climbing angle | 50°                                                                                                 |
| Scope of application   | Embankment, highway slope protection, orchard,Under lawn photovoltaic panels, land reclamation, etc |
| Operation method       | Remote control operation                                                                            |
| Total weight           | 140KG (bare)/170KG (packaged)                                                                       |
| Power                  | 7.5HP                                                                                               |
| Startup method         | electric start                                                                                      |
| Stroke                 | four-stroke                                                                                         |
| Fuel                   | gasoline                                                                                            |
| Engine                 | LONCIN                                                                                              |
| Maximum efficiency     | 1200m²/h                                                                                            |

# Product Parameters

## 452-60A LAWN MOWER



|                        |                                                                                                      |
|------------------------|------------------------------------------------------------------------------------------------------|
| Packing specification  | 1220*1060*780mm                                                                                      |
| Overall dimensions     | 1120*1000*580mm                                                                                      |
| Mowing width           | 600mm                                                                                                |
| Knife disk lifting     | 0-180mm                                                                                              |
| Walking speed          | 0-5km/h                                                                                              |
| Walking style          | Crawler self-propelled                                                                               |
| Maximum climbing angle | 50°                                                                                                  |
| Scope of application   | Embankment, highway slope protection, orchard, Under lawn photovoltaic panels, land reclamation, etc |
| Operation method       | Remote control operation                                                                             |
| Total weight           | 220 (bare)/256KG (packaged)                                                                          |
| Power                  | 11.5HP                                                                                               |
| Startup method         | Remote start stop (can be manually pulled)                                                           |
| Fuel                   | gasoline                                                                                             |
| Engine                 | LONCIN 452cc                                                                                         |
| Maximum efficiency     | 1300m²/h                                                                                             |

# Product Parameters

## SIMPLE FOUR- WHEEL DRIVE 196



|                        |                                                  |
|------------------------|--------------------------------------------------|
| Packing specification  | 1010*890*570mm                                   |
| Overall dimensions     | 1000*830*430mm                                   |
| Mowing width           | 550mm                                            |
| Cutting height         | 40/80mm                                          |
| Walking speed          | 0-5km/h                                          |
| Walking style          | Electric four-wheel drive walking                |
| Maximum climbing angle | 30°                                              |
| Scope of application   | Embankment and highway slope protection, orchard |
| Operation method       | Remote control operation                         |
| Total weight           | 100KG (bare)/130KG (packaged)                    |
| power                  | 7.5HP                                            |
| Startup method         | pull-start                                       |
| Stroke                 | four-stroke                                      |
| Fuel                   | gasoline                                         |
| Engine                 | LONCIN                                           |
| Maximum efficiency     | 1300m²/h                                         |